



MX938i Multiplex Intrusion Detector



- ▶ Interchangeable optical modules
- ▶ Selectable sensitivity
- ▶ Selectable signal gain
- ▶ Internal tamper switch

The MX938i is a ceiling-mount PIR intrusion detector that provides a 360° coverage pattern consisting of 64 zones grouped into 16 barriers, with one additional zone looking straight down from the unit (sabotage). Through the use of interchangeable optical modules, the detector can be mounted on ceilings from 2.4 m (8 ft) to 5.5 m (18 ft) high.

It is designed to connect to the multiplex bus of a control panel and optionally to an auxiliary 12 VDC power source. It is compatible with DS7400Xi Series Control Panels with a DS7430 or DS7436 Multiplex Expansion Module or with G Series Control Panels with a D8125MUX Module installed.

Note The DS7400Xi Series Control Panels require ROM version 1.07 or greater.

Functions

Interchangeable, Pointable Mirrors

The detector comes with two optical modules:

- **AR8-13:** For ceilings between 2.4 m (8 ft) and 4.0 m (13 ft) high
- **AR13-18:** For ceilings between 4.0 m (13 ft) and 5.5 m (18 ft) high

Selectable Sensitivity

Selectable for Standard, Intermediate or High:

- **Standard:** Recommended setting for maximum false alarm immunity. Tolerates environment extremes on this setting. Not recommended for Long Range or Barrier type patterns. The detector is shipped in Standard Sensitivity mode.
- **Intermediate:** Recommended setting for any location where an intruder is expected to cover only a small portion of the protected area. Tolerates normal environments on this setting. This setting will improve your intruder catch performance.
- **High:** Fast response to intruder signals. For use in quiet environments where thermal and illumination transients are not anticipated.

Signal Gain

The MX938i permits selection of the signal gain depending upon the environment to be protected. The gain select jumper is located under the optical module.

- **High Gain:** Recommended for large coverage applications up to 18.3 m (60 ft) in diameter. The MX938i is shipped in this setting. If the gain jumper is missing, it will default to high gain.

- **Low Gain:** Recommended for applications where the area to be covered is 12.2 m (40 ft) or less in diameter and for applications where the HIGH signal gain setting may be too sensitive for environmental extremes.

Note Setting the MX938i for the LOW signal gain setting reduces the coverage area to 12.2 m (40 ft) in diameter.


Internal Tamper Switch

The internal tamper switch sends a signal to the panel's multiplex bus for display at the keypads when the detector's cover is removed.


Certifications and Approvals

UL Standards	UL639, Intrusion-Detection Units
Approvals	CE


Installation/Configuration Notes

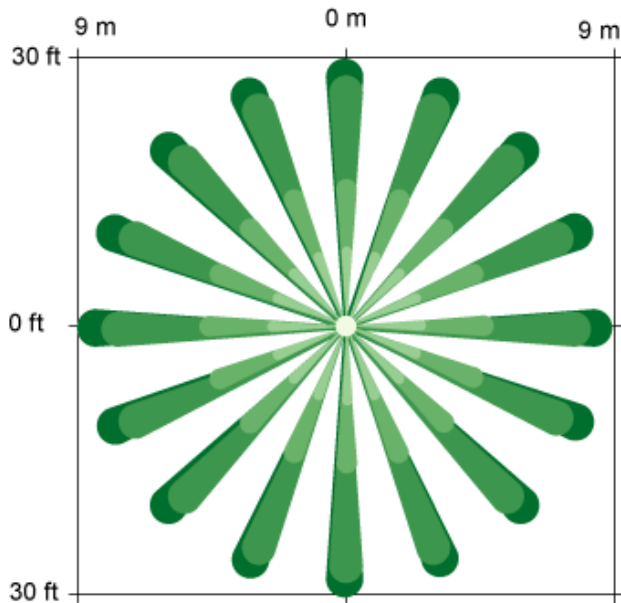

Top View
360° x 18.3 m (60 ft) Diameter

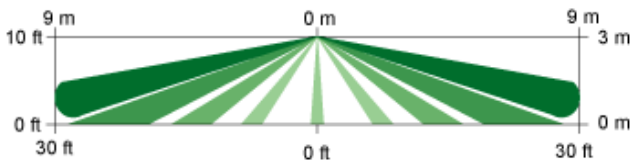

AR8-13 Side View
The following side views show a cross section of two opposite zones.

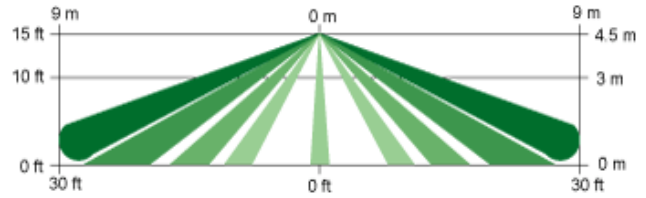

AR13-18 Side View
The following side views show a cross section of two opposite zones.

Coverage Information

The recommended mounting height range is 2.4 m (8 ft) to 5.5 m (18 ft). The pattern consists of 64 zones grouped into 16 barriers, with one additional zone looking straight down from the unit (sabotage). Each barrier is 9.2 m (30 ft) long and 1.3 m (4.4 ft) wide at 9.2 m (30 ft).

There is a choice of two optical modules depending on ceiling height. These choices provide 360° by 18.3 m (60 ft) diameter coverage when mounted on 2.4 m (8 ft) to 5.5 m (18 ft) high ceilings.

Wiring Considerations

Do not use shielded cable. Use wire that is no smaller than 0.8 mm (22 AWG) to connect the detector to the control panel.

Technical Specifications

Environmental Considerations

Temperature (Operating): -29°C to +49°C (-20°F to +120°F). *For UL Listed Requirements, the temperature range is 0°C to +49°C (+32°F to +120°F).*

Power Requirements

Standby Power:	There is no internal standby battery. Connect to DC power sources capable of supplying standby power if primary power fails. For each hour of standby time needed, 350 μ Ah are required. <i>For UL Listed Requirements, four hours (1400 μAh) minimum is required.</i>
Voltage (Input):	12 VDC from panel's MUX bus and optionally from an auxiliary power supply.
Current Draw (two-wire):	
LED Off:	< 350 μ A draw on MUX bus
In Alarm; LED On:	2 mA draw on MUX bus
Current Draw (four-wire):	
LED Off:	< 350 μ A draw on MUX bus, 0 mA draw on Aux. power
In Alarm; LED On:	< 350 μ A draw on MUX bus, 3 mA draw on Aux. power

Ordering Information

MX938i Multiplex Intrusion Detector	MX938i
Provides a 360° coverage pattern consisting of 64 zones grouped into 16 barriers.	

Hardware Accessories

AR13-18-3 Optical Module	AR13-18-3
Designed for 4 m (13 ft) to 6 m (18 ft) mounting height. Shipped in packages of three.	

Americas:
 Bosch Security Systems
 130 Perinton Parkway
 Fairport, New York, 14450, USA
 Phone: +1 585 223 4060
 Fax: +1 800 289 0096
 security.sales@us.bosch.com
 www.boschsecurity.us

Europe, Middle East, Africa:
 Bosch Security Systems B.V.
 P.O. Box 80002
 5600 JB Eindhoven, The Netherlands
 Phone: +31 40 27 83955
 Fax: +31 40 27 86668
 emea.securitysystems@bosch.com
 www.boschsecurity.com

Asia-Pacific:
 Bosch Security Systems Pte Ltd
 38C Jalan Pemimpin
 Singapore 577180
 Phone: +65 6319 3450
 Fax: +65 6319 3499
 apr.securitysystems@bosch.com
 www.boschsecurity.com

Represented by