



## ND 100 GLT panic button



- ▶ Panic button in DC circuit technology (GLT)
- ▶ For connecting to an intrusion panel
- ▶ Tamper contact
- ▶ Cable can be surface or flush mounted
- ▶ Cap with cover as trigger protection (optional)


The ND 100 GLT panic button is used for unobtrusively and manually triggering alarms at work places that are in potential danger of being held up such as banks, jewelry shops, businesses, private households, etc.

### Certifications and Approvals


| Country | Certification | ND 100 GLT  |
|---------|---------------|-------------|
| DE      | VdS           | G 195065, C |

### Installation/Configuration Notes


#### ND 100 GLT connections

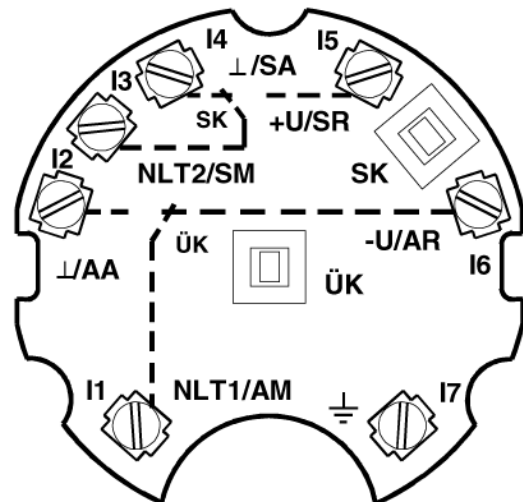

Connection to a central receiver station (EMZ)

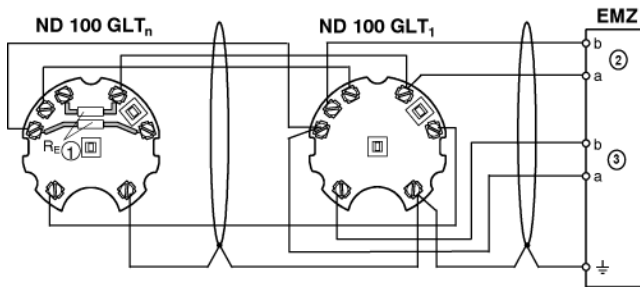

- 1 Connection wires with insulation pipe
- 2 Tampering
- 3 Hold-up

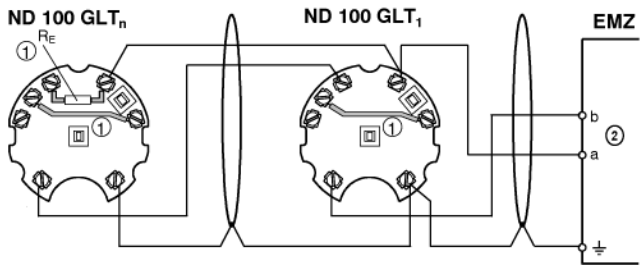

- 1 Connection wires with insulation pipe
- 2 Alarm

Technical Specifications

|                                     |                                |
|-------------------------------------|--------------------------------|
| Alarm contact (changeover contact)  | 30V_/300mA_                    |
| Tamper contact (Changeover contact) | 30V_/300mA_                    |
| Ambient temperature                 | 273 K to 323 K (0° C to 50° C) |
| Ambient climate                     | DIN 40 040 R14                 |
| Protection type                     | IP 40                          |
| Environmental class                 | 2                              |
| Housing material                    | ABS                            |
| Housing color                       | RAL 9002                       |
| Cover color                         | Gray                           |
| Weight                              | Approx. 0.07 kg                |
| Dimensions (D x H)                  | 81 x 31 mm                     |

Ordering Information

|                         |            |
|-------------------------|------------|
| ND 100 GLT panic button | 4998117557 |
|-------------------------|------------|

Hardware Accessories

|                |            |
|----------------|------------|
| Cap with cover | 3902115343 |
|----------------|------------|

Parts Included

| Type       | Qty. | Components                       |
|------------|------|----------------------------------|
| ND 100 GLT | 1    | Panic button incl. adhesive seal |

**Americas:**  
 Bosch Security Systems  
 130 Perinton Parkway  
 Fairport, New York, 14450, USA  
 Phone: +1 585 223 4060  
 Fax: +1 800 289 0096  
 security.sales@us.bosch.com  
 www.boschsecurity.us

**Europe, Middle East, Africa:**  
 Bosch Security Systems B.V.  
 P.O. Box 80002  
 5600 JB Eindhoven, The Netherlands  
 Phone: +31 40 27 83955  
 Fax: +31 40 27 86668  
 emea.securitysystems@bosch.com  
 www.boschsecurity.com

**Asia-Pacific:**  
 Bosch Security Systems Pte Ltd  
 38C Jalan Pemimpin  
 Singapore 577180  
 Phone: +65 6319 3450  
 Fax: +65 6319 3499  
 apr.securitysystems@bosch.com  
 www.boschsecurity.com

Represented by