




IOP 0008 A Input/output module



The IOP 0008 A Input/output module has eight independent digital inputs and eight open collector outputs for individual displays.

System Overview

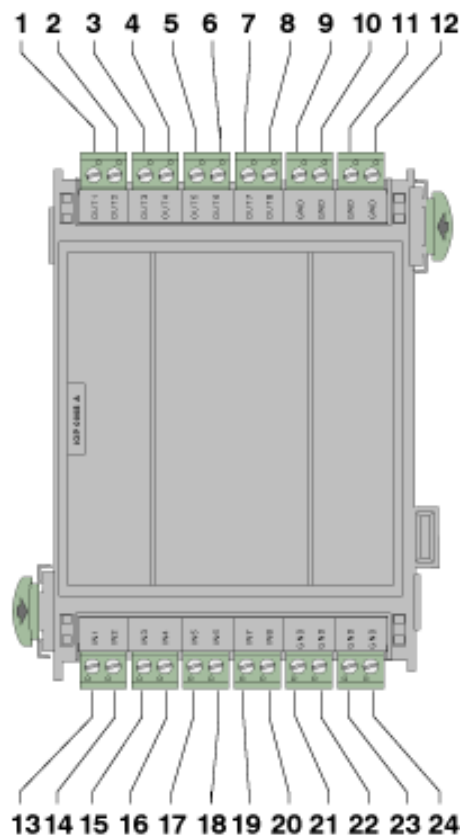

Pos.	Description	Connector
1-8	OUT1-OUT8	8 outputs with a max. voltage of 35 VDC, nominal 700 mA
9-12	GND	Ground
13-20	IN1-IN8	8 inputs with a max. voltage of 5 VDC at 0.1 mA per input
21-24	GND	Ground

Parts Included

Qty.	Components
1	IOP 0008 A Input/output module

Technical Specifications

Electrical

Input voltage	20 VDC ... 30 VDC (min...max) 5 VDC \pm 5%
Max. current consumption	10 mA (at 24 VDC)
Output current	Max 1.5 A, nominal 700 mA (short-circuit-protected)
Max. cable length	3 m (10 ft.) per input/output

Mechanics

Housing material	ABS plastic, Polyac PA-766 (UL94 V-0)
Housing color	Satin finish, anthracite, RAL 7016
Dimensions	Approx. 127 x 96 x 60 mm (5.0 x 3.8 x 2.4 in.)
Weight	Approx. 150 g (5.3 ounces)

Environmental conditions

Permitted operating temperature	-5 °C ... 50 °C (23 °F ... 122 °F)
Permitted storage temperature	-20 °C ... 60 °C (-4 °F ... 140 °F)
Permitted relative humidity	95%, non-condensing
Protective system compliant with	IP 30 IEC 60529

Ordering Information

IOP 0008 A Input/output module	IOP 0008 A
--------------------------------	------------

Europe, Middle East, Africa:
 Bosch Security Systems B.V.
 P.O. Box 80002
 5600 JB Eindhoven, The Netherlands
 Phone: +31 40 27 83955
 Fax: +31 40 27 86668
 emea.securitysystems@bosch.com
 www.boschsecurity.com

Americas:
 Bosch Security Systems
 130 Perinton Parkway
 Fairport, New York, 14450, USA
 Phone: +1 800 289 0096
 Fax: +1 585 223 9180
 security.sales@us.bosch.com
 www.boschsecurity.us

Asia-Pacific:
 Bosch Security Systems Pte Ltd
 38C Jalan Pemimpin
 Singapore 577180
 Phone: +65 6319 3450
 Fax: +65 6319 3499
 apr.securitysystems@bosch.com
 www.boschsecurity.com

Represented by