


BOSCH

Invented for life

DS936 Low Profile Panoramic PIR Detector



- ▶ Enhanced signal processing
- ▶ 360° x 7.5 m (24 ft) pattern
- ▶ Surface/semi-flush mountable
- ▶ Internal pointability
- ▶ Sealed detector chamber
- ▶ Mounting height 2 m to 3.6 m (7 ft to 12 ft)

The ceiling mount, low profile panoramic DS936 PIR Detector uses alternate polarity pulse count. It also uses a pointable Fresnel lens to provide up to 7.5 m (24 ft) of coverage and can be mounted on the surface, or semi-flush directly to a ceiling or a standard octagonal electrical box.

Functions

Enhanced Signal Processing

Field-selectable for standard, intermediate or high.


Test Features

External visible alarm LED. Internal noise voltage test pins provide precise pattern location and background disturbance evaluation using a standard analog meter.

Certifications and Approvals


All Models	UL639, Intrusion Detection Units CE
DS936	Complies with EN50131-1 grade 2

Installation/Configuration Notes

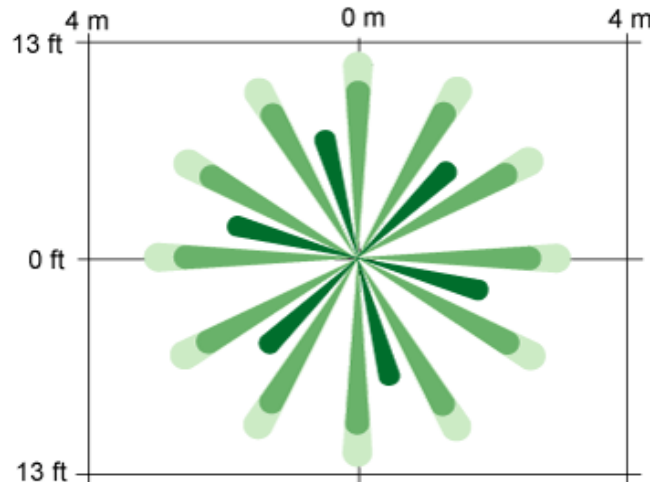

Top View

Broad Coverage: Up to 7.5 m x 360° (24 ft x 360°). Provides 360° coverage pattern. Coverage diameter is approximately two times the mounting height.

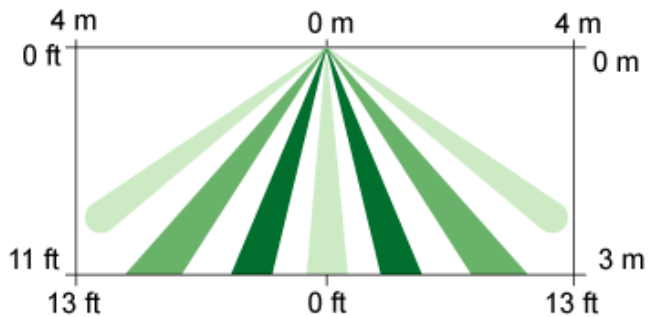**Side View**

Broad Coverage: Up to 7.5 m x 360° (24 ft x 360°).
Provides 360° coverage pattern. Coverage diameter is approximately two times the mounting height.

Technical Specifications**Enclosure Design**

Material:	High impact ABS plastic enclosure
Dimensions:	3.05 cm x 11.7 cm (1.2 in. x 4.6 in.)

Environmental Considerations

Operating Temperature:	-29°C to +49°C (-20°F to +120°F) <i>For UL Certified installations, 0°C to +49°C (+32°F to +120°F)</i>
------------------------	---

Radio Frequency Interference (RFI) Immunity:	No alarm or setup on critical frequencies in the range from 26 MHz to 950 MHz at 50 V/m.
--	--

DS936:	Complies with Environmental Class II (EN50130-5)
--------	--

Mounting

Height Range:	2 m to 3.6 m (7 ft to 12 ft)
Location:	Surface or semi-flush on ceiling or on standard 10 cm (4 in.) octagonal electrical box

Pattern Pointability:	±15° rotational
-----------------------	-----------------

Outputs

Alarm:	Normally-closed reed relay rated at 3.0 W, 125 mA at 28 VDC for resistive loads and protected by a 4.7 Ω resistor in the common C leg.
--------	--

Tamper:	Normally-closed cover activated tamper switch with separate terminals. Tamper contacts rated 125 mA at 28 VDC maximum.
---------	--

Power Requirements

Current:	20 mA at 12 VDC
Voltage:	10 VDC to 15 VDC

Ordering Information

DS936 Low Profile Panoramic PIR Detector	DS936
Provides enhanced signal processing, 360° x 7.5 m (24 ft) pattern, mounts to surfaces, or mounts semi-flush into a ceiling.	

DS936-FRA Low Profile Panoramic PIR Detector	DS936-FRA
For use in France. Provides enhanced signal processing, 360° x 7.5 m (24 ft) pattern, mounts to surfaces, or mounts semi-flush into a ceiling.	

DS936-CHI Low Profile Panoramic PIR Detector	DS936-CHI
For use in China. Provides enhanced signal processing, 360° x 7.5 m (24 ft) pattern, mounts to surfaces, or mounts semi-flush into a ceiling.	

Hardware Accessories

TC6000 Test Cord	TC6000
Test cord for connecting a compatible detector's test pins to a voltmeter. It is 4.6 m (15 ft) long.	

Americas:
 Bosch Security Systems
 130 Perinton Parkway
 Fairport, New York, 14450, USA
 Phone: +1 585 223 4060
 Fax: +1 800 289 0096
 security.sales@us.bosch.com
 www.boschsecurity.us

Europe, Middle East, Africa:
 Bosch Security Systems B.V.
 P.O. Box 80002
 5600 JB Eindhoven, The Netherlands
 Phone: +31 40 27 83955
 Fax: +31 40 27 86668
 emea.securitysystems@bosch.com
 www.boschsecurity.com

Asia-Pacific:
 Bosch Security Systems Pte Ltd
 38C Jalan Pemimpin
 Singapore 577180
 Phone: +65 6319 3450
 Fax: +65 6319 3499
 apr.securitysystems@bosch.com
 www.boschsecurity.com

Represented by