




ISN-CMET-200AR Commercial Metal Contact

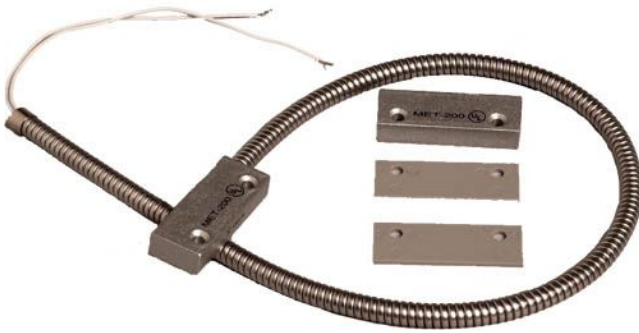

- ▶ Closed loop
- ▶ Wide gap
- ▶ Ideal for commercial applications

The contact is available in a metal finish. Use for commercial applications that need a wide gap.

Certifications and Approvals

UL and CE

Installation/Configuration Notes

Compatibility Information

All contact models are compatible with control panel models that accept contact inputs.

Parts Included

Quantity Per Package	Component
1	Contact
1	Magnet

Technical Specifications

Gap Width:	31.75 mm (1.25 in.)
Contact Dimensions:	9.5 mm x 16 mm x 50.8 mm (0.375 in. x 0.625 in. x 2 in.)
Cable Length:	46 cm (18 in.)
Switch Configuration Type:	Single pole single throw (SPST)
Maximum Contact Resistance:	150 $\mu\Omega$ (micro-ohm)
Minimum Breakdown Voltage:	250 VDC
Insulation Resistance:	$10^{10} \Omega$
Electrostatic Cap:	0.3 PF
Contact Capacity:	10 VAC
Maximum Conductive Current:	1.0 A
Maximum Voltage:	100 V

Package Information

ATTENTION! Each package contains one contact and one magnet.

Ordering Information

ISN-CMET-200AR Commercial Metal Contact ISN-CMET-200AR
Package contains one contact and one magnet.