




DR 2020 T/AV Log printer with roll-up equipment

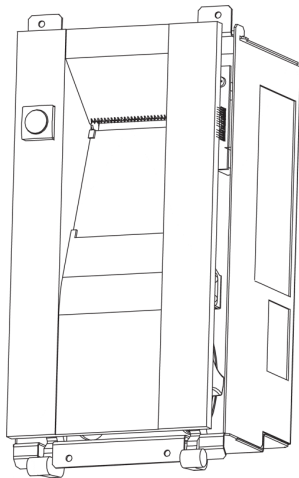

For installation in the display carrier

Note The log printer must already be taken into account when ordering. Installation of the printer can only occur in the factory, subsequent installation on location not possible.

Technical Specifications

Construction type	Thermal printer
Printout	Alphanumeric
Character height	2.7 mm ± 0.2 mm
Number of lines per printout	Max. 3 lines, of these 1 line standard output 2 lines additional information
Number of characters / lines	Max. 40 characters
Print speed	At least 5 lines/sec
Paper type	Thermoprint paper rolls
Paper width	58 mm +0/-1 mm
Operating voltage	10.5 V DC . . . 29 V DC
Current consumption	I= 600 mA at 12 V
Power supply	From the control panel
Fuse	T1A
Interface	Parallel
Baud rate	2400 bit/sec, 9600 bit/sec (standard)
Data format	8 bits, 1 start bit, 1 stop bit, no parity bit, ASCII characters
EMC interference immunity	EN 50130-4
EMC emitted interference	EN 61000-6-3
Monitoring	Paper end (signaling of at least 500 print lines before the end) Cover tamper contact
Protection class as per EN 60950 II	

Protection category as per EN 60529	IP 30
Contamination level	2 (as per EN 60950)
Permitted relative humidity	93 %, at + 40°C
Environmental class as per VdS 2110	II
Permitted operating temperature	0 °C . . . 50 °C
Dimensions (H x W x D)	130 x 160 x 230 mm
Weight	Approx. 2 kg
Color	Anthracite, RAL 7016

Ordering Information

DR 2020 T/AV Log printer with roll-up equipment DR 2020 T/AV
Installation of the printer can only occur in the factory, subsequent installation on location not possible

Americas:
Bosch Security Systems
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 585 223 4060
Fax: +1 800 289 0096
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 (0) 40 27 83955
Fax: +31 (0) 40 27 86668
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Bosch Security Systems Pte Ltd
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3450
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by